

V A P O R P H A S E C O R R O S I O N T H I R T O R



VpCI™

corrosion inhibiting powders

steel / cast iron / aluminum / copper / brass / galvanized / bronze



interior cavities recessed areas
COMPLEX GEOMETRICS



V A P O R I Z E D C O R R O S I O N I N H I B I T O R P O W D E R S

VpCI™ corrosion inhibiting powders

VpCI™

What are VpCI™ Powders and why are they used?

VpCI™s protect metals electrochemically.

Corrosive agents attack metals at every opportunity – especially in crevices, cavities and voids where paints and coatings are rendered useless. Now there is a way to defend against corrosion at a molecular level – Vapor phase Corrosion Inhibiting (VpCI™) powders from Cortec® Corporation.

Cortec® VpCI™ powders shield metals unlike any other protective substance. Cortec® manufactures VpCI™ powders with moderate vapor pressure so they volatilize easily. VpCI™ powders sublime directly to a vapor that seals metals with a chemically adsorbed monomolecular film.

uses OF powder

Immediate results. Constant protection.

VpCI™ powders stop the corrosion process electrochemically. Application is easy, with little or no surface preparation required. Cortec VpCI™s even prevent further corrosion of previously corroded, painted or coated surfaces.



Once applied, Cortec powders protect both ferrous and non-ferrous metals for a minimum of 24 months without deterioration – and no need for regeneration. VpCI™ powders are not consumed by the protective action. If the VpCI™ layer is disturbed, it replenishes itself automatically with continuous vapor deposition.

When used for short- or long-term storage, the VpCI™ layer need not be removed prior to start-up of equipment. However, removal – if necessary – is just as easy as application. Any low pressure air gun or simple water rinse will work.

Cortec® VpCI™s are environmentally safe. They do not contain nitrites, silicones, phosphates, heavy metals or other harmful chemicals.

VpCI™ powders can be sprayed or blown into cavities or interiors having complex geometries. Certain VpCI™ powders are water soluble for wet applications such as hydrotesting. For pumps, heat exchangers, generators and piping, a VpCI™ powder solution may be circulated through the system to assure contact with all surfaces. Drying is not necessary.

Powder may also be sprinkled or dispersed into small volumes, but should be fogged with a blower for volumes greater than 36 cubic feet (one cubic meter).

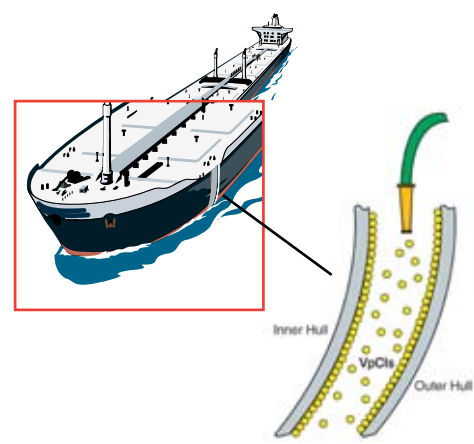

Cortec® products protect with a thin, monomolecular film. The barrier re-heals and self-replenishes and can combine with other functional properties for added protective capabilities.



VpCI™



metals

TO BE protected

Protect all metals against corrosion.

VpCI-307™ offers multimetal protection for ferrous and non-ferrous metals including: copper, brass, galvanized steel, aluminum, zinc and cast iron.

VpCI-308™ offers biodegradable and water soluble multimetal protection.

VpCI-309™ is an excellent all-purpose powder for ferrous and stainless steel alloys. With its strong vapor carrying power, it is suitable for protection of tank interiors.

VpCI-608™ is designed to be used in combination with cathodic protection, protecting unprotected or damaged areas, saving electrical energy and prolong the effective life of the sacrificial cathod.

VpCI-609® protects ferrous metals and aluminum. An excellent low cost water soluble powder, VpCI-609® is optimal for wet and dry lay-up of equipment.

Metal Protection Guide

	Carbon Steel	Stainless Steel	Cast Iron	Aluminum Alloys	Galvanized Steel	Brass (<30%Zn)	Copper
VpCI-307®	1	1	1	1	1	1	1
VpCI-308™	1	1	1	1	1	1	1
VpCI-309™	1	1	1	1			
VpCI-608™	1	1	1	1	1	1	1
VpCI-609®	1	1	1	1			

Exposure Limitations

1. Enclosed. For use when in non-ventilated equipment housings, tanks, voids, tubular structures, etc.

KEY: Recommended Consult Cortec® For Specific Usage Not Recommended or Test Data Not Available

Typical Dosages

For continuous protection in humid and contaminated atmospheres, a dosage range of 0.3-0.5oz/ft³ (300-500 g/m³) is recommended. The exact dosage is a function of the length of protection (2+ years) and the level of corrosivity of a specific environment.

VpCI applications OF powder

VpCI™ powders in action.

Babcock & Wilcox. VpCI-309™ powder. Heat exchangers and boiler tube assemblies.

Combustion Engineering. VpCI-309™ powder. Protection of power plant equipment.

General Electric. VpCI-309™ powder. Steam turbine assemblies.

New Hybernia, Canada. VpCI-609® powder. Hydrotesting of piping and various assemblies in offshore platform applications.

Shell. VpCI-309® and VpCI-609® powders. For lay-up of refineries.

Conoco. VpCI-307™ and VpCI-609® powders. Double-bottom tanker hulls and for bottom protection of crude oil storage tanks.

Smithsonian Air Space Museum. VpCI-307™ powder. Protection of internal cavities of historic aircraft.

features AND benefits

Why Cortec? Why now?


Key VpCI™ Features:

- Three-phase protection at the molecular level
- Versatile chemistry allows wet or dry application
- Contains no nitrites, phosphates or silicones
- Unlike desiccants, VpCI™ powders do not require regeneration
- Self-replenishing VpCI™ technology
- Near neutral pH levels

Resulting Benefits:

- One step, durable protection
- Easy application, easy removal
- Safe for the environment
- Cost effective corrosion protection
- Constant protection against all types of corrosion
- Does not increase alkalinity in systems

VpCI™ Protection Greatly Reduces Corrosion

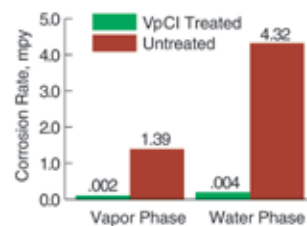

VpCI™ treated metal versus untreated metal in mils/year (mpy) – both vapor and water phase.



buyer's guide

Product	Description	Packaging	Applications
VpCI-307®	Vapor phase corrosion inhibitor powder for ferrous and non-ferrous metals.	5 lbs. (2.27 kg), 50 lbs. (22.7 kg) and 100 lbs. (45.4 kg)	Tubular structures, pipes, vessels, steam condensation lines, boilers, cooling towers, double bottom tanker hulls, rudder cavities, ballast tanks, bilges, heat exchangers, voids and all other cavities of ships, airplanes, vehicles, etc. Internal surfaces of compressors, turbines, engines, tanks, boilers, air tanks and valves.
VpCI-308™	Multimetal powder designed for wet or dry applications. Biodegradable and non-toxic.	5 lbs. (2.27 kg), 50 lbs. (22.7 kg) and 100 lbs. (45.4 kg)	Same as above
VpCI-309™	Vapor phase corrosion inhibitor powder for ferrous metals.	5 lbs. (2.27 kg), 50 lbs. (22.7 kg) and 100 lbs. (45.4 kg)	Same as above
VpCI-608™	A non-toxic vapor phase corrosion inhibitor powder, specially formulated for protection of above ground storage tanks (AST).	5 lbs. (2.27 kg), 50 lbs. (22.7 kg) and 100 lbs. (45.4 kg)	To be used in combination with existing cathodic protection or without it; specifically in AST bottoms, and similar applications.
VpCI-609®	Water soluble vapor phase corrosion inhibitor powder for ferrous metals and aluminum.	5 lbs. (2.27 kg), 50 lbs. (22.7 kg) and 100 lbs. (45.4 kg)	To protect equipment during and after hydrostatic testing. Ideally suited for longer cavities, tanks, heat exchanges, etc. Higher evaporation rate than VpCI-307®/309™. Shorter protection span.

packaging and storage information

Products are packaged in fiber drums with a moisture barrier liner. VpCI™ powders should be stored in their original containers under dry conditions not exceeding 100°F (38°C).

TOTAL CORROSION CONTROL™

Cortec® Corporation is dedicated to controlling corrosion at all stages of a product life cycle. Cortec® Corporation has developed a diverse range of corrosion protection products including cleaners, metalworking fluids, water and oil-based coatings and corrosion inhibitors, rust removers, paint strippers, emitters, powders, packaging foams, paper, films, as well as surface treatments and admixtures for concrete. Contact Cortec for additional brochures and information.

Visit our website for more information on Cortec® Vapor phase Corrosion Inhibitors™.

CortecVpCI.com

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement product shall be paid by customer.

Cortec Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



4119 White Bear Parkway, St. Paul, MN 55110 USA
 Phone (651) 429-1100, Fax (651) 429-1122
 Toll Free (800) 4-CORTEC, E-mail info@CortecVCI.com
 Internet http://www.CortecVCI.com

Distributed by:



Shanghai CERTEC Material Technology Co., Ltd

Authorized Distributor of CORTEC VCI Products
 Add: Rm 612, Building 2, Zheqiao Rd 277, Pudong, Shanghai, China.
 Tel: 021-51923318 / 51923316 / 013816395867
 E-mail: zy@shcertec.com Http://www.shcertec.com

